



FOR ELEVATING AUXILIARY EQUIPMENT

- **Standard and custom sizes**
Ensure the perfect fit for your equipment.
- **Full welded construction**
Provides strength and durability.
- **Mounting pads on legs**
Allow stand to be bolted to floor.
- **Optional casters***
Make movement easy.

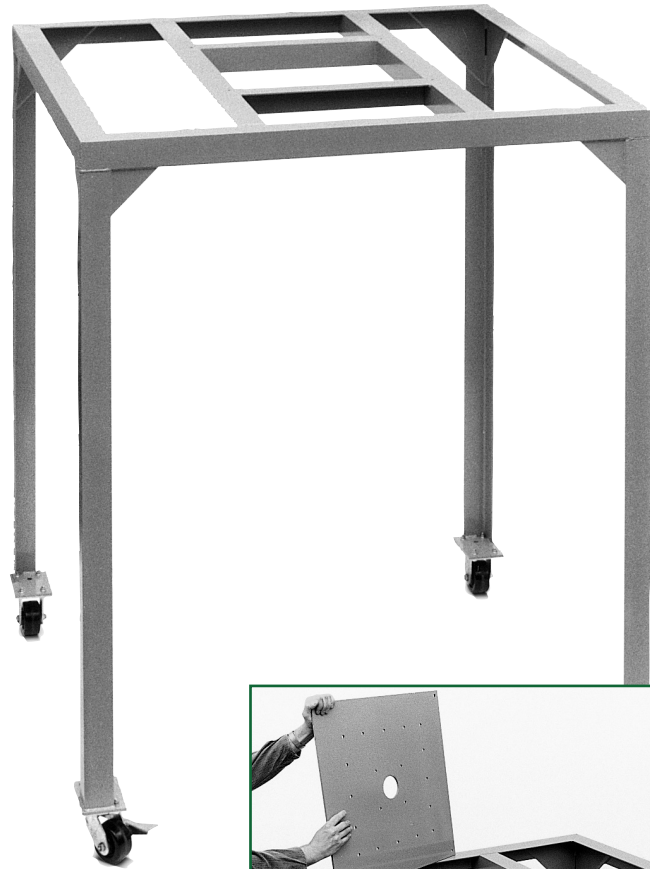

Model FS2, shown at right, and Model FS3 feature angle iron construction. Model FS1 has a solid sheet metal top surface with an opening for the adapter plate.

When ordering, please detail the equipment to be mounted on the stand so that the correct adapter plate may be specified.

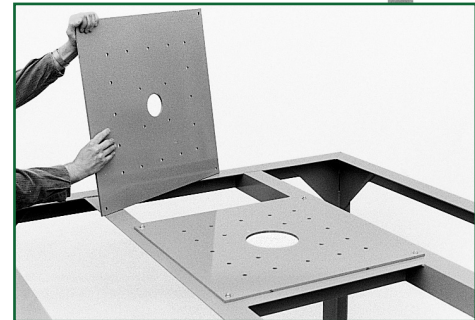

A 1/4" -thick **adapter plate**, matching the bolt pattern of the auxiliary equipment, is bolted to the top of the floor stand.

SPECIFICATIONS

MODEL	STANDARD MODELS			CUSTOM MODELS		
	FS1	FS2	FS3	FS1	FS2	FS3
MAXIMUM WEIGHT CAPABILITY / lb {kg}	1000 {454}	2000 {907}	3000 {1361}	1000 {454}	2000 {907}	3000 {1361}
OUTSIDE DIMENSIONS / in {mm}						
Height	29 {737}	66 {1676}	66 {1676}	12-42 {305-1067}	18-66 {457-1676}	18-66 {457-1676}
Width	30 {762}	60 {1524}	60 {1524}	24-36 {610-914}	38-70 {965-1778}	40-70 {1016-1778}
Depth	30 {762}	60 {1524}	60 {1524}	24-36 {61-914}	38-70 {965-1778}	40-70 {1016-1778}
CASTERS*						
Casters may be added <i>only</i> if the combined stacked height of the mounted equipment is <i>less</i> than 3.5 times the selected width or depth. If casters are added, specify desired height, less caster dimension (5" for FS1, 6" for FS2).						
Addition to Height / in {mm}	+5 {127}	+6 {152}	Not Available	+5 {127}	+6 {152}	Not Available
INSIDE DIMENSIONS / in {mm}						
For Custom Models, subtract the value shown from the outside dimensions.						
Height	26.75 {679}	58.25 {1480}	59.25 {1505}	H - 2.25 {57}	H - 7.75 {197}	H - 6.75 {171}
Width	24 {610}	46.5 {1181}	51 {1295}	W - 6 {152}	W - 13.5 {343}	W - 9 {229}
Depth	25 {635}	51.25 {1302}	51 {1295}	D - 5 {127}	D - 8.75 {222}	D - 9 {229}